



Residential

Boosts Voice & 4G LTE

Multiple Users

All Carriers

Auto Gain Control

# FLARE™

Home/Office Voice & 4G Data Cellular Booster

## SureCall Flare Canada Five-band Home Cellular Signal Booster

### Overview

The SureCall Flare is an all-carrier voice and 4G LTE signal booster that provides a simplified setup by combining the booster and indoor antenna into an attractively designed tabletop unit. Signal is delivered to the Flare booster using the provided directional yagi outdoor antenna and a single connecting low-loss cable. SureCall's award-winning, patented all-carrier booster then delivers enhanced signal coverage to all mobile devices within range, up to 3,000 sq. ft., for clearer and more reliable voice and data performance.


### Features and Benefits

- Simplified setup that features a combined booster and indoor antenna
- Boosts voice and 4G LTE signal for all mobile devices
- Provides improved coverage up to 3,000 sq. ft.
- Supports multiple users simultaneously
- Backed by industry leading 3 year manufacturer's warranty

### Booster Kit Includes:

The Flare Kit (SC-Poly-DT-Y-CA-Kit) includes: the Flare booster with built-in indoor antenna, power supply, 50 feet of RG-6 coax cable and outdoor yagi antenna.

### Installation Example

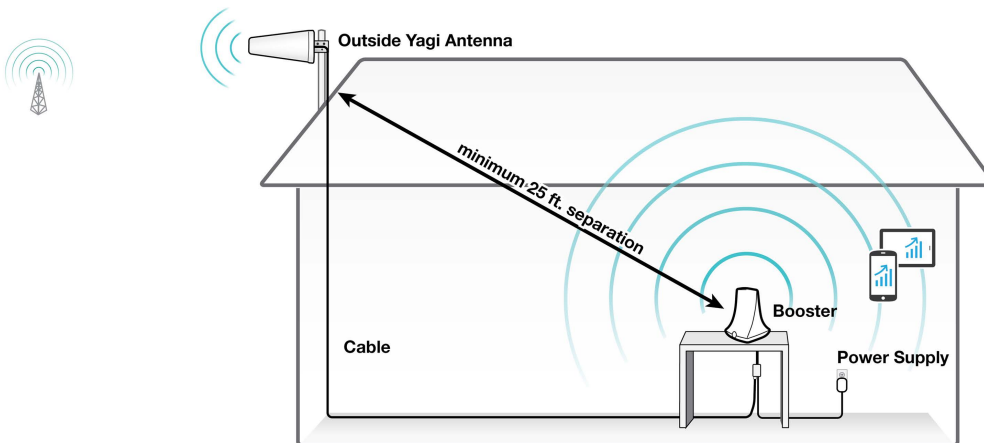

The SureCall Flare signal booster

### SPECIFICATIONS

Uplink Frequencies:	698-716 / 776-787 / 824-849 / 1710-1755 / 1850-1915 (MHz)
Downlink Frequencies:	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155 (MHz)
Max Gain:	75.1 dB
Input/Output Impedance:	75 / 50 Ω
Cable:	RG6 (50 ft.)
RF Connectors:	F Female
IC ID:	7784A-FLARE

► Patent No. US 8,867,572 B1; US 9,100,839 B2

